


VIEW FROM TERMINAL BOX END

VIEW FROM PROCESS END



ILLUSTRATION

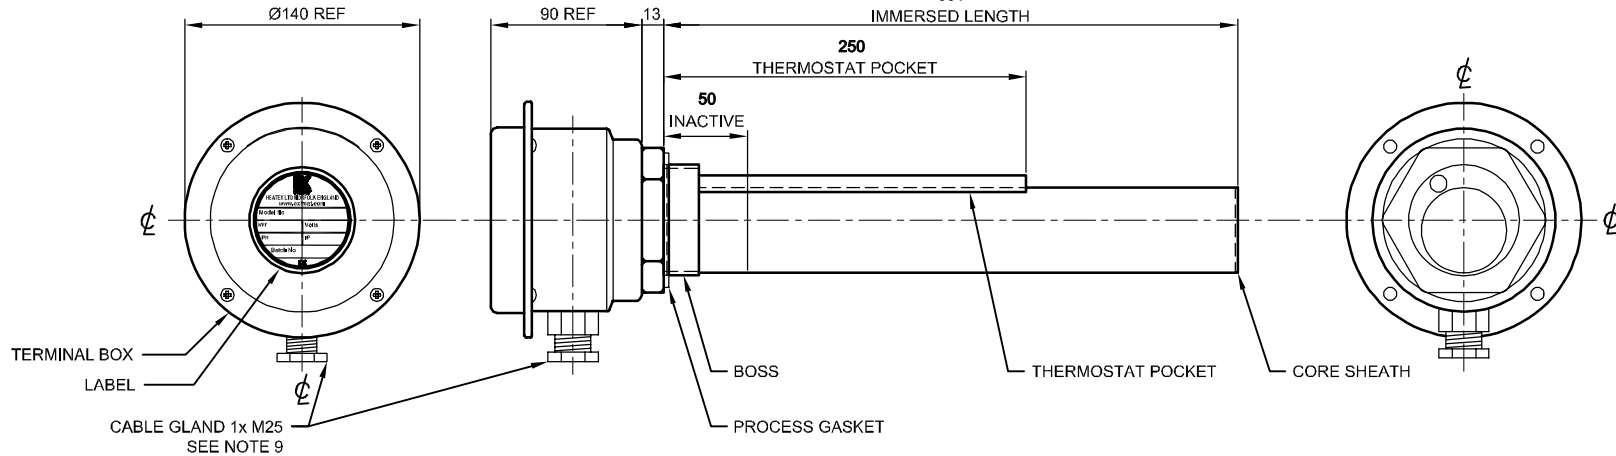


NOTES

- RATING: **1KW**
- SUPPLY: **240V 1PH 50HZ**
- MATERIAL:
ELEMENT ~ CERAMIC CORE TYPE HOUSED IN **Ø2" SHEATH**

THERMOSTAT POCKET ~ **EXTENDED SURFACE STAINLESS STEEL**
TERMINAL BOX ~ MILD STEEL TO IP66
- PROCESS FIXING: **2" BSP BRASS BOSS**
- 1x CONTROL THERMOSTAT: STEM TYPE AUTO-RESET SCALED @ +5/+80°C**
- FINISH: TERMINAL BOX WHITE NYLON. REMAINDER NATURAL.
- MAX WORKING PRESSURE 3,5 BARg.
- WHEN THERMOSTAT & POCKET IS NOT FITTED, CORE SHEATH IS FITTED CONCENTRIC IN BOSS.
- 1x M25 CABLE GLAND IS SUITABLE FOR Ø12mm-Ø18mm CABLE.**
-

WIRING DIAGRAM

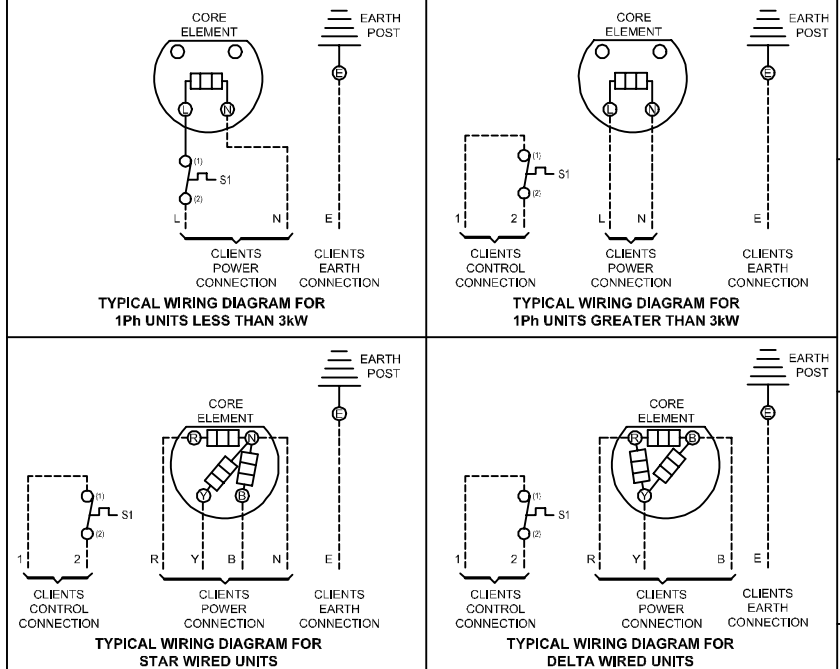

REV	COMMENTS	DATE	DRWN	CHKD	APPR
1	FIRST ISSUE	29/10/03	IAP		



HEATEX LTD
NORFOLK ENGLAND

BSI
REGISTERED
QUALITY ASSURANCE
SCHEME

Certificate No. FM 28078

SCALE **NOT TO SCALE**
3rd ANGLE PROJECTION

TOLERANCES UNLESS OTHERWISE STATED

Ø	1.5mm
0.0	0.25mm
0.00	0.25mm
0.000	0.1mm
ANGULAR	2'

TITLE
HB SERIES SINGLE CORE TYPE IMMERSION HEATER GENERAL ARRANGEMENT

STOCK CODE No.

HEATEX DRAWING No.	SHEET No.	REV
HBX115B	01 of 01	01

PRODUCT: **HB SERIES SINGLE CORE TYPE IMMERSION HEATER** FORMAT: PDF